
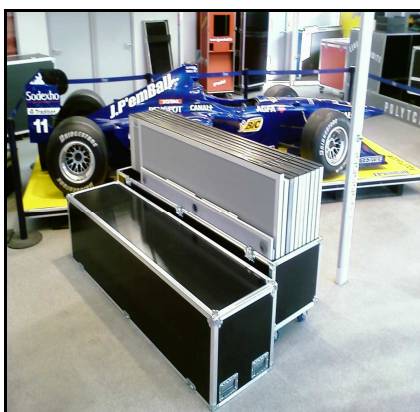


# POLYTCAB® 2100

(Mark and model under protection)

*Transportable Booth for Simultaneous Interpretation*

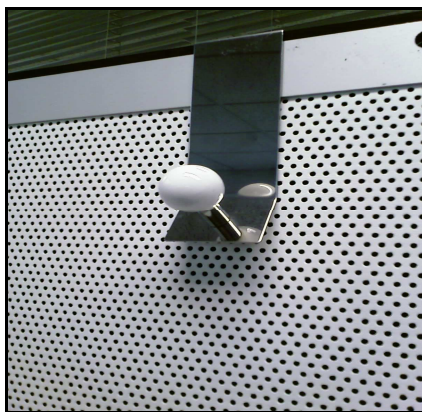

## **J.P'emBall**

**7, rue J. MONNET  
45130 St. AY / France  
T. 02.38.88.96.03 / F. 02.38.88.96.04  
www.jpemball.fr**



# POLYTCAB® 2100

## Technical Information Fitting the ISO 4043 norm

### Dimensions :

- Interior booth : 1600 x 1600 x 2000 mm
- Exterior booth : 1670 x 1670 x 2035 mm
- Standard panel : 800 x 2000 x 35 mm
- Roof panel : 1670 x 835 x 35 mm
- Work table : 1640 x 450 x 35 mm

### Weight :

- **Total for a booth : 114 kg**
- Standard panel : 9 kg
- Window panel : 13 kg
- Door panel : 12 kg
- Roof panel : 8 kg
- Work table : 4 kg

Total panel for a 2 people booth : 10 panels.  
Assembly : 10 min, 1 hexagonal key, 1 person

### Sound attenuations :

Difference between acoustic pressure levels (D) from the booth to the room, asked in the **ISO 4043 norm**.

Frequency (Hz)	250	500	1000	2000	4000
<b>D (dB)</b>	<b>12</b>	<b>15</b>	<b>18</b>	<b>20</b>	<b>20</b>

Difference owned by our **POLYTCAB®** :

(Sound source for the test : Pink sound of 90 dB)

Frequency (Hz)	250	500	1000	2000	4000
<b>DI (dB)</b>	<b>27,5</b>	<b>23,5</b>	<b>29,5</b>	<b>31</b>	<b>36,5</b>
Difference with the norm, in %	<b>+129%</b>	<b>+57%</b>	<b>+64%</b>	<b>+55%</b>	<b>+82%</b>

### Options :

- 2 Ultra silent fans (9 dB), 12V, integrated into roofs panels.
- Extension to 3 places, to 2400 x 1600 x 2000 mm : Panels (1 window panel, 1 standard one, 1 roof), Table.
- 4 window panels on hinges, for a pre-assembled angle (Be careful, global weight of 26 kg!)
- Door : wide door way for wheelchair, 950 mm.
- **1 POLYTCASE®** for transport : 2110 x 540 x 1080 mm ext., 45 kg when empty.

### Detailed information :

- Fire delaying used materials.
- 2 removable carry coats.
- Foam with washable white & grey imitation leather completion
- 2 brooms pass wire, left & right.
- Anti-abrasion 6mm polycarbonate window.
- Anodised aluminium frame.
- **No flying posts needed for the assembly**

